

Dry Block Temperature Calibrator QUARTZ-35

Temperature range: -30°C up to +150°C (at 20°C ambient temperature)

Type QUARTZ-35-2I: with 2 inputs for ext. reference and test specimen

- for mobile or stationary use
- micro processor operated (PID)
- ramp function, thermostat test

Typical applications:

- calibration and checking of all kind of thermometer
- calibration and checking of thermostats
- computer aided calibration via RS 232 interface

Technical Data:

Temperature range: -30°C...+150°C (at 20°C ambient temperature)
Accuracy of temperature reading: $\pm 0.15^\circ\text{C}$
Integrated reference probe: Resistance thermometer (3-wire), class A
Display resolution: 0.01 / 0.1°C (display switchable to °F and K)
Stability of regulated temperature: $\pm 0.03^\circ\text{C}$ (at 0°C)
Mean heating time: 20°C per minute / Mean cooling time: 22°C per minute
Uniformity (at 0°C): radial $\pm 0.02^\circ\text{C}$, axial $\pm 0.1^\circ\text{C}$
Ventilation: 2 vents, electronic regulated
RS232 interface: included (build-in)
Ramp function: min. 0.1°C per minute
Dry block: 140 mm dept, 35 mm diameter
Usable dept: 130 mm
Power Supply: 230 VAC (optional: 115 VAC)
Power consumption: 300 VA
Case: metall, dimension 160 x 340 x 330 mm
Weight: 10 kg net (shipment weight: 17 kg)
NOTE: The stated accuracy is valid for ambient temperature +10°C...+40°C and is guaranteed for 1 year.

Scope of standard Supply:

Temperature Calibrator QUARTZ-35, power supply cable, fuses kit, thermostats connection cables, operating manual, certificate of calibration (traceable), tweezers for inserts removing.
1 insert with 6 holes (4 - 4.5 - 5.5 - 6.5 - 8.5 - 10.5 mm)

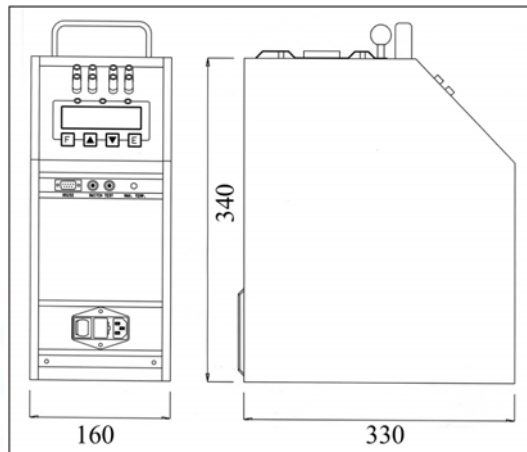
Additional for type QUARTZ-35-2I:

Version with data acquisition card and two input devices to measure Pt 100 (3-/4-wire, -100...+700°C, $\pm 0.3^\circ\text{C}$), Thermocouple type J (0...1000°C, $\pm 1^\circ\text{C}$) and Thermocouple types K/N/R/S (0...1300°C, $\pm 1^\circ\text{C}$).

Optional Accessories:

- Insert without holes (to be drilled by customer)
- Insert with 3 holes (4.5 - 6.5 - 9.5 mm diam.)
- Insert with 2 holes (6.5 - 19.5 mm)
- Insert with 1-3 holes as per customers request, diameter 3.5 to 20 mm
- Insert with 4-6 holes as per customers request, diameter 3.5 to 20 mm
- Soft bag
- Alu case
- PC-Windows Software "AQ2sp" and RS232-Kabel

With the software "AQ2sp" it is possible to remote-control the calibrator with a PC. Automatic or manual calibration of one or more test specimen, stress tests, life cycle tests, thermostat tests. Printing of calibration certificates.

**DRUCK & TEMPERATUR Leitenberger GmbH**

Bahnhofstr. 33 • D-72138 Kirchentellinsfurt • Germany

Tel.: +49 - 71 21 - 9 09 20 - 0 • Fax: +49 - 71 21 - 9 09 20 - 99

E-Mail: DT-Export@Leitenberger.de • <http://www.druck-temperatur.de>