

HITEMP140

HIGH TEMPERATURE DATA LOGGER



Features

- $\pm 0.1^{\circ}\text{C}$ (0.18°F) Accuracy
- Operates Up To 140°C (284°F)
- Submersible (IP68)
- NIST traceable
- User Replaceable Battery
- Rugged
- Programmable start time
- Programmable stop time
- Engraved Label
- Probe Lengths Up To 7"
- Battery Life Indicator

Benefits

- Simple Setup and Installation
- Minimal Long-Term Maintenance
- Long-Term Field Deployment

Applications

- Autoclave Verification
- Implement HACCP Programs
- Food Preparation and Processing
- Environmental Studies
- Well Monitoring
- Dishwasher Testing
- Pasteurization

The HiTemp140 is a rugged, high precision, temperature data logger that is built for use in harsh environments. This stainless steel device is submersible and can withstand temperatures up to 140°C (284°F). With the HiTemp140's standard calibration, an accuracy of $\pm 0.1^{\circ}\text{C}$ (0.18°F) can be achieved over a wide temperature range.

The HiTemp140 can store up to 32,700 readings, and features a rigid external probe capable of measuring extended temperatures, up to 260°C (500°F). Custom probe lengths are available up to 7". The device records date and time stamped readings, and has non-volatile solid state memory that will retain data even if the battery becomes discharged.




IFC400 (sold separately)

Using the MadgeTech Software, starting, stopping and downloading the HiTemp140 is simple and easy. To use, simply place the HiTemp140 in the IFC400 or IFC406 docking station (sold separately). Using the software, an immediate or delay start can be chosen, as well as the reading rate. Start the data logger, remove it from the docking station and the device is ready to be deployed. Graphical, tabular and summary data is provided for analysis and data can be viewed in $^{\circ}\text{C}$, $^{\circ}\text{F}$, K or $^{\circ}\text{R}$. The data can also be automatically exported to Excel® for further calculations.

MADGETECH DATA LOGGER SOFTWARE

Key

- A** Graph View
- B** Tabular Data View
- C** Statistics
- D** Digital Calibration
- E** Copy to Excel®

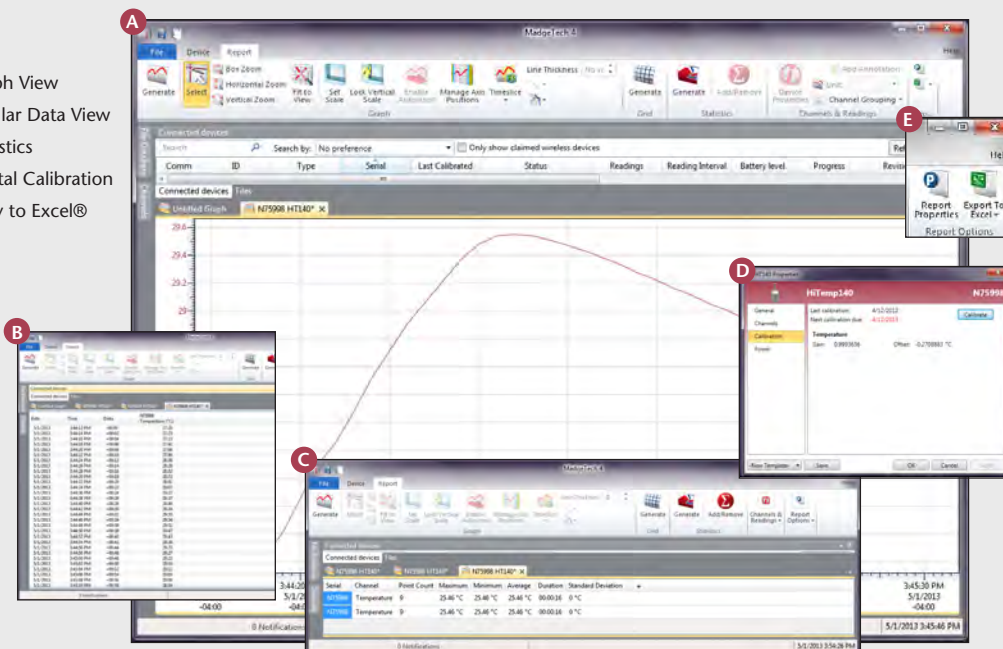

Software Features:

- Multiple graph overlay
- Statistics
- Digital calibration
- Zoom in/ zoom out
- Lethality equations (F_0 , PU)
- Mean Kinetic Temperature
- Full time zone support
- Data annotation
- Min./Max./Average lines
- Data table view
- Automatic report generation
- Summary view
- Multilingual

HITEMP140 SPECIFICATIONS*

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY REMEDY LIMITATIONS APPLY. CALL 1-603-456-2011 OR GO TO WWW.MADGETECH.COM FOR DETAILS.

Temperature Sensor:	100Ω Platinum RTD
Probe Measurement Range:	-200°C to +260°C (-328°F to +500°F)
Temperature Resolution:	0.01°C (0.02°F)
Calibrated Accuracy:	±0.1°C/±0.18°F (20°C to +140°C/68°F to +284°F) ±0.3°C/±0.54°F (-20°C to +19.99°C/-4°F to +67.98°F) ±0.4°C/±0.72°F (-40°C to -20.01°C/-40°F to -4.02°F)
Start Modes:	- Software programmable immediate start - Delay start up to 18 months in advance
Stop Modes:	Manual or Timed (specific date and time)
Real Time Recording:	May be used with PC to monitor and record data in real time
Password Protection:	An optional password may be programmed into the device to restrict access to configuration options. Data may be read out without the password.
Memory:	32,700 readings
Wrap Around:	Yes
Reading Rate:	One second up to once every 24 hours
Battery Type:	3.6V high-temperature lithium battery included; user replaceable
Battery Life:	1 year typical (1 minute reading rate at 25°C/77°F)

Calibration:	Digital calibration through software
Calibration Date:	Automatically recorded within device
Data Format:	Date and time stamped °C, °F, K, °R
Time Accuracy:	±1 minute/month at 20°C to 30°C (68°F to 86°F) (Stand alone mode)
Computer Interface:	IFC400 OR IFC406 USB docking station required; 125,000 baud
Software:	XP SP3/Vista/Windows 7/Windows 8 (<i>MadgeTech 4 Only</i>)
Operating Environment:	-40°C to +140°C (-40°F to +284°F), 0%RH to 100%RH
Dimensions (Body HiTemp140-1):	1.6" x 0.970" dia. (40mm x 24.6mm dia.)
Dimensions (Body HiTemp140-2, 5.25, 7):	1.9" x 0.970" dia. (48mm x 24.6mm dia.)
Model Number	Dimensions (Probe)
HITEMP140-1:	1.1" x 0.125" dia. (0.188" transitional dia.) 27mm x 3.2mm dia. (4.8mm transitional dia.)
HITEMP140-2: HITEMP140-2-TD:	2.0" x 0.188" dia. (51mm x 4.8mm) 2.0" x 0.125" dia. (0.188" transitional dia.) 51mm x 3.2mm dia. (4.8mm transitional dia.)
HITEMP140-5.25: HITEMP140-5.25-TD:	5.25" x 0.188" dia. (133mm x 4.8mm dia.) 5.25" x 0.125" dia. (0.188" transitional dia.) 133mm x 3.2mm dia. (4.8mm transitional dia.)
HITEMP140-7:	7.0" x 0.188" dia. (178mm x 4.8mm dia.)
Weight:	4.2 oz (120g)
Material:	316 Stainless Steel
Approvals:	CE

BATTERY WARNING: WARNING: FIRE, EXPLOSION, AND SEVERE BURN HAZARD. DO NOT SHORT CIRCUIT, CHARGE, FORCE OVER DISCHARGE, CRUSH, PENETRATE, OR INCINERATE. BATTERY MAY LEAK OR EXPLODE IF HEATED ABOVE 150°C (302°F).

ORDERING INFORMATION

MODEL	DESCRIPTION	PRICE (U.S.)
HITEMP140-1	High Temperature Data Logger with a 1" probe	\$499.00
HITEMP140-2/ HITEMP140-2-TD	High Temperature Data Logger with a 2" probe/2" transitional diameter probe	\$499.00
HITEMP140-5.25/ HITEMP140-5.25-TD	High Temperature Data Logger with a 5.25" probe/5.25" transitional diameter probe	\$499.00
HITEMP140-7	High Temperature Data Logger with a 7" probe	\$499.00
IFC400	Docking station with USB cable, software and manual	\$120.00
IFC406	6 Port, Multiplexer docking station with USB cable, software and manual	\$549.00
ER1425S-HT	Replacement battery for the HiTemp140	\$50.00
*NIST	NIST Calibration Certificate	\$60.00

ASK ABOUT
OUR OTHER
DATA
LOGGERS

Temperature
Humidity
Pressure
pH
Level
Shock
LCD Display
Pulse/Event/State
Current
Voltage
Wireless
Intrinsically Safe
Spectral Vibration
Motion

For Quantity Discounts call 603-456-2011 or email sales@madgetech.com

*To order the product with the NIST certificate add -CERT to the end of the part number and add \$60.00 to the price.