

Dry Block Temperature Calibrators **LR-Cal PYROS** series with DNV approval

- **LR-Cal PYROS-375:** +30°C...+375°C
 - **LR-Cal PYROS-650:** +35°C...+650°C
- at +20°C ambient temperature

This calibrators are type approved by **DET NORSKE VERITAS**. For testing and calibrating of all kind of temperature instruments, e.g. dial thermometer, digital thermometer, temperature probes and sensors.



N° A-13487




These innovative dry block temperature calibrators have been designed for on-site applications and for the severe conditions of the naval and marine sectors. Their ease of use, compact and practical design, make them unbeatable in industrial processes where the verification of the temperature measurement systems are a key issue for the control of the process and the quality of the final product.

Special attention was paid to reduce the weight, to the small size and sound design obtained by using an aluminium body and aluminium and stainless steel for many internal parts.


The appliance innovative ventilation system allows the calibrator to keep the temperature on the top of the oven lower compared to competitors' oven. The flow of air on the upper part of the oven is diverted to the rear of the appliance by a tangential flow that touches the calibration well. As a result, the heads of the test items remain at a considerably lower temperature reducing very much the compensation errors produced by the heads heating.

Available block inserts:

LR-Cal PYROS-375 inserts:

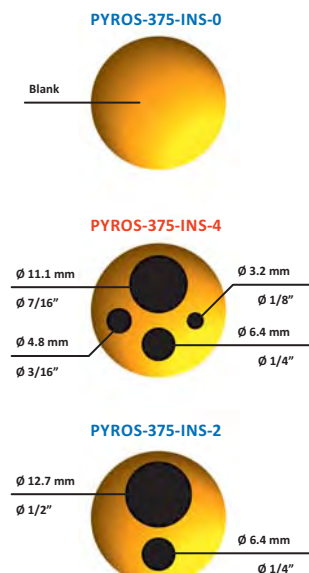

LR-Cal PYROS-650 inserts:

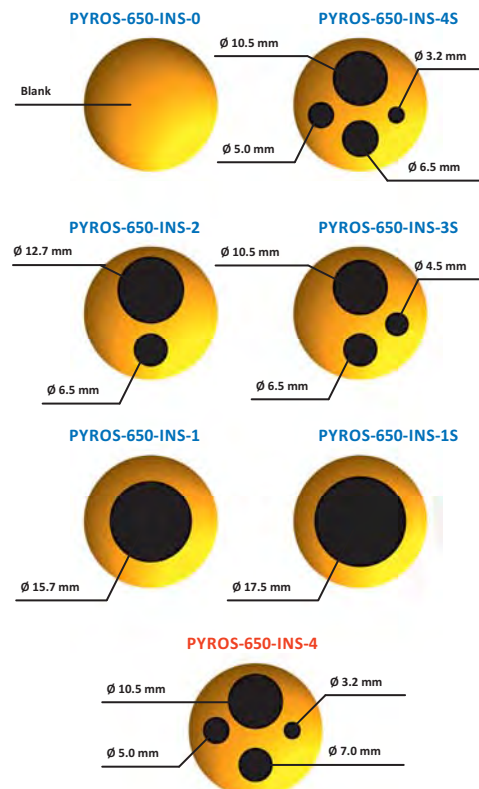

Blue = order-code

Red = included in scope of standard delivery

**PYROS-375
PYROS-650**

**Portable Dry Block Temperature
Calibrators with DNV approval**

LR-Cal



TECHNICAL DATA	PYROS-375		PYROS-650
Temperature range	+30...+375°C		+35...+650°C
Mean heating time (incl. stabilization)	20 min. (+30...+375°C)		35 min. (+50...+650°C)
Mean cooling time (incl. stabilization)	40 min. (+375...+100°C)		60 min. (+650...+100°C)
Axial temperature uniformity	a) ±0.10°C at +50°C a) ±0.20°C at +150°C a) ±0.30°C at +375°C	b) ±0.02°C at +50°C b) ±0.05°C at +150°C b) ±0.15°C at +375°C	±0.13°C at +250°C ±0.15°C at +450°C ±0.35°C at +650°C
Radial temperature uniformity (at 40 mm depth)	a) ±0.10°C at +50°C a) ±0.15°C at +150°C a) ±0.20°C at +375°C	b) ±0.05°C at +50°C b) ±0.10°C at +150°C b) ±0.15°C at +375°C	±0.22°C
Usable insertion depth in the metal block	150 mm		
Hole diameter	26 mm		
Display accuracy	±0.25°C at +150°C ±0.35°C at +375°C		±0.50°C
Stability	a) ±0.15°C	b) ±0.10°C	±0.30°C
Display resolution	0.1°C		
Temperature units	°C / °F		
Over temperature cut out	yes		
Thermostat/Switch test	5 VDC		
Display	LED, 2 lines		
Interface	RS232		
Slope rate	yes		
Calibration	From 1 to 10 points calibration		
Dimension	130 x 260 x 280 mm		
Weight	5.4 kg		
Power supply (±10%, 50/60 Hz)	115/230 VAC		
Power consumption	600W		

All values are valid at ambient temperature +20°C

Diameter of the sensor, used for testing the performances:

LR-Cal PYROS-375 : Pt 100 a) diameter 6 mm / b) diameter 3 mm

LR-Cal PYROS-650 : Pt 100 diameter 4,5 mm

Standard scope of delivery

PYROS-375

PYROS-DNV-375

PYROS-650

PYROS-DNV-650

- Dry block calibrator
- Tweezers for insert removing
- Kit of spare fuses
- Connection cables for thermostat testing
- Operation manual
- Test certificate
- 1 insert with 4 holes
3.2 + 4.8 + 6.4 + 11.1 mm



- Dry block calibrator
- Tweezers for insert removing
- Kit of spare fuses
- Connection cables for thermostat testing
- Operation manual
- Test certificate
- 1 insert with 4 holes
3.2 + 5.0 + 7.0 + 10.5 mm



Optional accessories

for PYROS-375

Order Code

- 1 blank insert **PYROS-375-INS-0**
- 1 insert with 4 holes
3.2 + 4.8 + 6.4 + 11.1 mm **PYROS-375-INS-4**
- 1 insert with 2 holes
6.4 + 12.7 mm **PYROS-375-INS-2**
- 1 soft bag **PYROS-TASCHE**
- 1 plastic marine case IP67 **PYROS-KOFFER**

for PYROS-650

Order Code

- 1 blank insert **PYROS-650-INS-0**
- 1 insert with 2 holes
6.5 + 12.7 mm **PYROS-650-INS-2**
- 1 insert with 3 holes
4.5 + 6.5 + 10.5 mm **PYROS-650-INS-3S**
- 1 insert with 4 holes
3.2 + 5.0 + 7.0 + 10.5 mm **PYROS-650-INS-4**
- 1 insert with 4 holes
3.2 + 5.0 + 6.5 + 10.5 mm **PYROS-650-INS-4S**
- 1 insert with 1 hole 15.7 mm **PYROS-650-INS-1**
- 1 insert with 1 hole 17.5 mm **PYROS-650-INS-1S**
- 1 soft bag **PYROS-TASCHE**
- 1 plastic marine case IP67 **PYROS-KOFFER**

PYROS-TASCHE
Schultertragetasche
400 x 170 x 285 mm



PYROS-KOFFER
Wasserdichter
„Marine“-Koffer IP 67
mit Druckausgleichsventil
410 x 535 x 220 mm



DRUCK & TEMPERATUR Leitenberger GmbH • Bahnhofstr. 33 • D-72138 Kirchentellinsfurt • GERMANY

Tel. +49 (0) 7121-90920-0 • Fax +49 (0) 7121-90920-99 • DT-Info@Leitenberger.de • www.LR-Cal.net • www.druck-temperatur.de