



“Agimatic-N” with heating

ELECTRONIC CONTROL OF SPEED AND POWER TO THE HEATER.

CONTROL PANEL

1. Switch on button with indicator lamp for heating and for stirring speed.
2. Electronic stir speed control.
3. Electronic heater energy control from 0-100%, synchronised with an indicator lamp that functions when the plate is hot.
4. Illuminated indicator when the heater is “on”.



MODEL

Part No.	Maximum stir volume litres	Height/width/Depth (exterior) cm	Power W	Weight Kg
AGIMATIC-N 7000243	up to 10	14,5 19 26	550	3,5

Supplied with a PTFE coated stir bar of Ø 8 x 40 mm long.




“Agimatic-E” with heating

ELECTRONIC TEMPERATURE CONTROL OF SPEED AND POWER TO THE HEATER.
FROM 50 °C TO 350 °C PRECISION ± 2 °C.

CONTROL PANEL

1. Switch on button with indicator lamp for heating and for stirring speed.
2. Electronic stir speed control.
3. Electronic temperature control of the heater plate from 50 °C to 350 °C synchronised with an indicator lamp that functions when the plate is hot.
4. Illuminated heater indicator when the heater is “on”. Precision ± 2 °C.

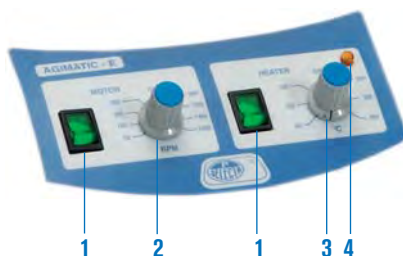

MODEL

Part No.	Maximum stir volume litres	Height/width/Depth (exterior) cm	Power W	Weight Kg
AGIMATIC-E 7002431	up to 10	14,5 19 26	550	3,5

Supplied with a PTFE coated stir bar of Ø 8 x 40 mm long.



Magnetic stirrer “Agiman”

ELECTRONIC CONTROL OF SPEED AND POWER TO THE HEATER.
WITH A MECHANISM FOR ATTACHING HEATING MANTLES.

CONTROL PANEL

- Switch on button with indicator lamp for heating and for stirring speed.
- Electronic stir speed control.
- Electronic heater energy control from 0-100%, synchronised with an indicator lamp that goes on when the mantle is hot.
- Illuminated heater indicator when the mantle is “on”.

ACCESSORIES

Attachable heating mantle for the “Agiman” magnetic stirrer.

Part No.	Capacity flask ml
3000447	250
3000448	500
3000449	1000
3000450	2000

Complements for Agimatic-S-N-E and Agiman.
See accessories on page 34 and 35.

MODEL

Part No.	Maximum stir volume litres	Height/width/Depth (exterior) cm	Weight Kg
AGIMAN 7000446	up to 2	14,5 19 26	3,5

Supplied with a PTFE coated stir bar of Ø 8 x 40 mm long.

